



MT-464042/ND 4.9-5.9 GHz, 16.5dBi 65° Double Dual Slant Sector Antenna



ELECTRICAL

REGULATORY COMPLIANCE	RoHS, CE 0682
FREQUENCY RANGE	4.9-5.9 GHz
GAIN	16 dBi ± 0.5 dB
VSWR	1.5 : 1 (typ), 1.7:1 (max)
POLARIZATION	Double Dual Linear ± 45°
-3DB ELEVATION BEAMWIDTH	7° (typ)
-3 DB AZIMUTH BEAMWIDTH	65° (typ)
ELEVATION SIDELobe LEVEL	-12 dB (typ.)
F/B RATIO	-40 dB (typ)
CROSS POLARIZATION	-15 dB (typ)
PORT TO PORT ISOLATION	20dB (typ)
POWER	6W (max)
INPUT IMPEDANCE	50 (ohm)
LIGHTNING PROTECTION	DC Grounded
MECHANICAL	
DIMENSIONS (LXWXD)	371 x 371 x 40mm (max)
CONNECTOR	4 x N-Type Female
WEIGHT	2 Kg (max)
MOUNTING KIT	MT-120018
RADOME MATERIAL	Plastic
BASE PLATE MATERIAL	Aluminum with chemical conversion coating

[ADD TO COMPARISON](#) | [COMPARE](#)

ENVIRONMENTAL

TEST	STANDARD	DURATION	TEMPERATURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-55°C	
HIGH TEMPERATURE	IEC 68-2-2	72 h	+71°C	
TEMP. CYCLING	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles
VIBRATION	IEC 60721-3-4	30 min/axis		Random4M3
SHOCK MECHANICAL	IEC 60721-3-4			4M3
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h		95%
WATER TIGHTNESS	IEC 529			IP67
SOLAR RADIATION	ASTM G53	1000h		
FLAMMABILITY	UL 94			Class HB
SALT SPRAY	IEC 68-2-11 Ka	500h		

ICE AND SNOW

25mm Radial




WIND SPEED SURVIVAL OPERATION

220 Km/h
160 Km/h




WIND LOAD (SURVIVAL)
FRONT THRUST
SIDE THRUST



39.6 kg
4.3 kg

AZIMUTH RADIATION PATTERN MIDBAND
FREQ. 5.47 GHZ

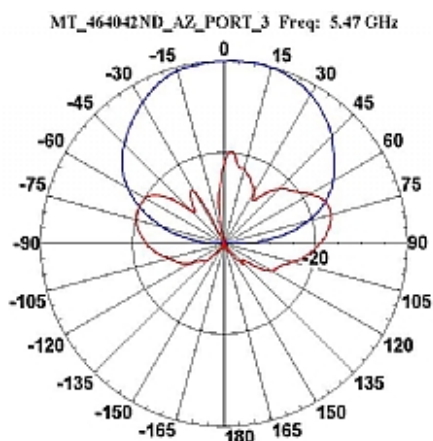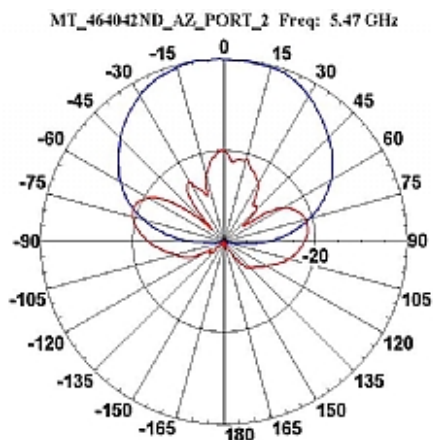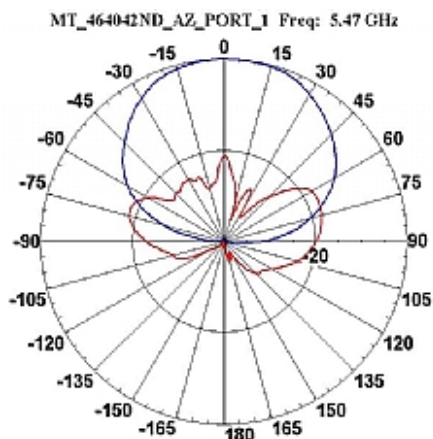

ELEVATION RADIATION PATTERN MIDBAND
FREQ. 5.47 GHZ

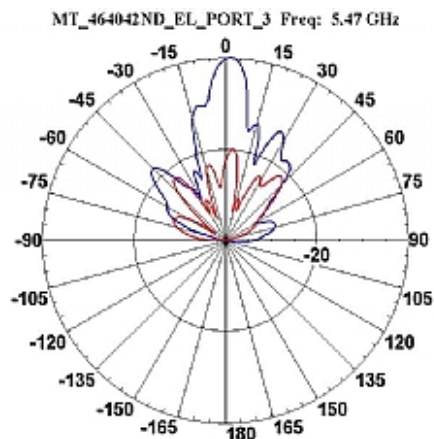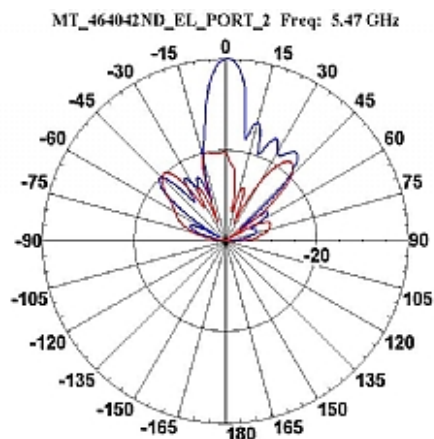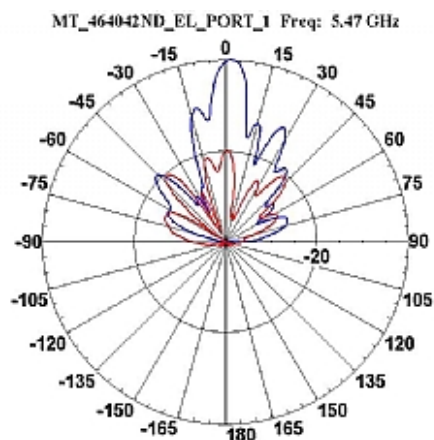

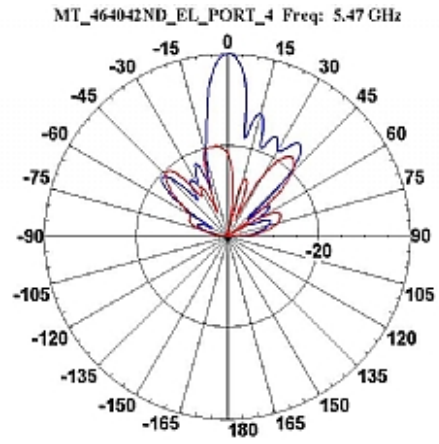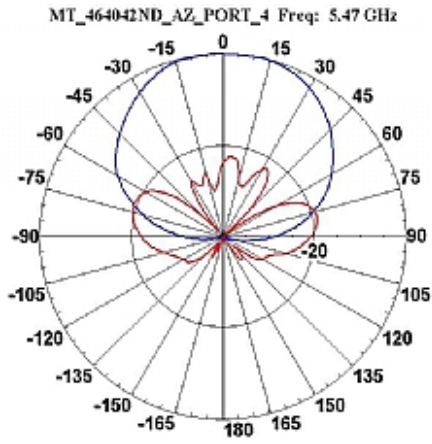

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

MTI Wireless Edge Ltd.
11 Hamelacha St. Afek Industrial Park Rosh Ha'ayin 48091, Israel
Tel: +972-3-9008900 | Fax: +972-3-9008901 | www.mtiwe.com